

# AMBIENT TEMPERATURE MONITORING



SMART BUILDING



TEMPERATURE

Ref : TEM-LAB-13NS



 + 20 years \*

 15 km \*  IP68 (Outdoor use)

 Local or Public Network compliant

\* Depending on the operating conditions

SENLAB™ T IS A SMART WIRELESS DEVICE, FEATURING

THE LoRaWAN™ CONNECTIVITY PROTOCOL, EQUIPPED WITH

A HIGH-PRECISION TEMPERATURE SENSOR ( $\pm 0.2^{\circ}\text{C}$ ).

Designed for outdoor use, Senlab™ T offers a ruggedized IP68 casing for outdoor use which enables a reliable wireless connectivity for continuous temperature monitoring in harsh environments.

This Senlab offers best in class features such as :

- **Battery life time more than 20 years**
- **Rich Data Content thanks to datalogging : Up to 24 measures / radio transmission**
- **Radio Performances**
- **Advanced set of functionalities**


## TYPICAL APPLICATIONS

- Control and maintain the cold chain
- Guarantee the traceability of food products
- Control equipment overheating
- Control outdoor crop, silo temperature

## TECHNICAL SPECIFICATIONS

Physical specifications	Dimensions	56 x 102 x 35 mm
	Weight	140 gr
	Operating temperature	-20°C to +70°C
RF specifications	RF sensitivity	-137 dBm
	RF power	+14 dBm (25 mW)
	Radio band	868 MHz
EC Conformity : Compliant with Directive 2014/53/UE (RED)	EMC	Final draft EN 301 489-3 v2.1.1 Draft EN 301 489-1 v2.2.0
	Radio	EN 300 220-2 v3.1.1
	Magnetic field exposure	EN 62479
	Safety	EN 60950-1, EN 60950-22

**DIMENSIONAL DRAWING**

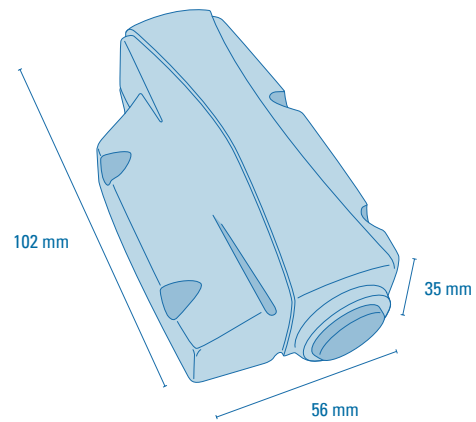

**TECHNICAL FEATURES FOCUS**

**Plug & Play installation**

- Product fixing with 2 cable ties on wall or pipe
- Long term measure stability (< 0,01°C/Yr - no need for calibration)
- Activation with magnet (LED feedback)

**High configurability**

- Temperature precision of  $\pm 0.2^{\circ}\text{C}$  typ., range  $[-20 ; +70^{\circ}\text{C}]$
- High and Low threshold overrun configuration
- Log and transmit mode for battery lifetime enhancement (up to 24 compressed measures per transmission)
- Reconfiguration possible over the air

**Network Configuration**

- LoRaWAN parameters (OTAA or ABP activation mode, initial datarate,...)
- Encryption keys customizable by client
- Standard LoRaWAN retries support
- Radio collisions avoidance by pseudo-randomization of transmissions
- Advanced transmission reliability mechanisms (redundancy of data, recovery of lost messages, ...)

**BATTERY LIFE DURATION ESTIMATION**

This following matrix provides the estimated battery lifetime depending on the average spreading factor used by the Senlab and the transmission period.

Battery life (years)	10 min	15 min	30 min	1 h	2 h	4 h	6 h	8 h	12 h	24 h
<b>SF7</b>	19,2	>20	>20	>20	>20	>20	>20	>20	>20	>20
<b>SF8</b>	15,3	18,3	>20	>20	>20	>20	>20	>20	>20	>20
<b>SF9</b>	10,8	13,7	18,9	>20	>20	>20	>20	>20	>20	>20
<b>SF10</b>	6,9	9,3	14,3	19,5	>20	>20	>20	>20	>20	>20
<b>SF11</b>	4,2	5,8	9,8	14,9	>20	>20	>20	>20	>20	>20
<b>SF12</b>	2,4	3,5	6,2	10,3	15,4	>20	>20	>20	>20	>20

6 measures per frame.

**For guidance and information purposes only.**